


Größen

Qseals ST04 ist verfügbar in mindestens 35 verschiedenen Größen:

D1	D7	L4	Einheit
10.00	19.20	6.60	mm
12.00	21.60	5.60	mm
14.00	24.60	5.60	mm
15.00	24.60	6.60	mm
16.00	28.00	7.50	mm
18.00	30.00	8.00	mm
19.00	31.00	7.50	mm
20.00	35.00	7.50	mm
22.00	35.00	7.50	mm
24.00	38.00	7.50	mm
25.00	38.00	7.50	mm
26.00	40.00	8.00	mm
28.00	42.00	9.00	mm
30.00	45.00	10.50	mm
32.00	48.00	10.50	mm
33.00	48.00	11.00	mm
35.00	52.00	11.00	mm
38.00	55.00	10.30	mm
40.00	58.00	10.80	mm
42.00	62.00	12.00	mm
43.00	62.00	12.00	mm
45.00	64.00	11.60	mm
48.00	68.40	11.60	mm
50.00	69.30	11.60	mm
55.00	75.40	13.30	mm
58.00	78.40	13.30	mm
60.00	80.40	13.30	mm
65.00	85.40	13.00	mm
70.00	92.00	13.00	mm
75.00	99.00	14.00	mm
80.00	104.00	15.00	mm
85.00	109.00	14.80	mm
90.00	114.00	14.80	mm
95.00	120.30	15.80	mm
100.00	123.30	15.80	mm

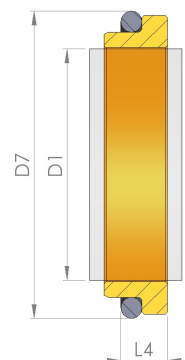

Technische Spezifikationen

Temperatur	... bis ... °C
Druck	... bar
Rotationsgeschwindigkeit	... m/s
Nach links drehen	Nein
Nach rechts drehen	Nein
Ausgeglichen	Nein

Stationäre Oberfläche

Qseals ST04 ist verfügbar in mindestens 4 verschiedenen stationären Oberflächenmaterialien:

- Ceramic (CER)
- Silicon carbide (SIC)
- Stainless steel 316 (SS316)
- Tungsten carbide (TC)

Elastomere

Qseals ST04 ist verfügbar in mindestens 8 verschiedenen Elastomeren:

- Aflas (AFL)
- EPDM (EPDM)
- FEP Viton/Silicone (FEP)
- Kalrez (KAL)
- Nitrile (NIT)
- PTFE (PTFE)
- Silicone (SIL)
- Viton (VIT)

Alternativen

name ist eine Alternative zu mindestens 7 Produkten anderer Marken:

- AES S01U
- AES S01
- Burgmann G4
- Eriks SAO
- Fluiten B
- Vulcan 8STD
- Vulcan Type 8.STAT