


Größen

Qseals ST09 ist verfügbar in mindestens 34 verschiedenen Größen:

D1	D7	L4	Einheit
10.00	21.00	10.00	mm
12.00	23.00	10.00	mm
14.00	25.00	10.00	mm
16.00	27.00	10.00	mm
18.00	33.00	11.50	mm
20.00	35.00	11.50	mm
22.00	37.00	11.50	mm
24.00	39.00	11.50	mm
25.00	40.00	11.50	mm
28.00	43.00	11.50	mm
30.00	45.00	11.50	mm
32.00	48.00	11.50	mm
33.00	48.00	11.50	mm
35.00	50.00	11.50	mm
38.00	56.00	14.00	mm
40.00	58.00	14.00	mm
43.00	61.00	14.00	mm
45.00	63.00	14.00	mm
48.00	66.00	14.00	mm
50.00	70.00	15.00	mm
53.00	73.00	15.00	mm
55.00	75.00	15.00	mm
58.00	78.00	15.00	mm
60.00	80.00	15.00	mm
63.00	83.00	15.00	mm
65.00	85.00	15.00	mm
68.00	90.00	18.00	mm
70.00	92.00	18.00	mm
75.00	97.00	18.00	mm
80.00	105.00	18.20	mm
85.00	110.00	18.20	mm
90.00	115.00	18.20	mm
95.00	120.00	17.20	mm
100.00	125.00	17.20	mm

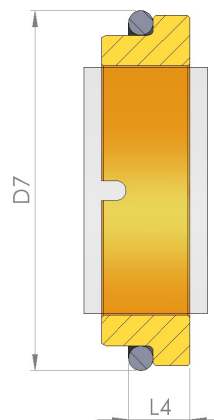

Technische Spezifikationen

Temperatur	... bis ... °C
Druck	... bar
Rotationsgeschwindigkeit	... m/s
Nach links drehen	Nein
Nach rechts drehen	Nein
Ausgeglichen	Nein

Stationäre Oberfläche

Qseals ST09 ist verfügbar in mindestens 5 verschiedenen stationären Oberflächenmaterialien:

- Carbon (CAR)
- Ceramic (CER)
- Silicon carbide (SIC)
- Stainless steel 316 (SS316)
- Tungsten carbide (TC)

Elastomere

Qseals ST09 ist verfügbar in mindestens 8 verschiedenen Elastomeren:

- Aflas (AFL)
- EPDM (EPDM)
- FEP Viton/Silicone (FEP)
- Kalrez (KAL)
- Nitrile (NIT)
- PTFE (PTFE)
- Silicone (SIL)

- Viton (VIT)

Alternativen

name ist eine Alternative zu mindestens 10 Produkten anderer Marken:

- AES S02U
- AES S02
- Anga A0 EN 12756
- Burgmann G9
- Eriks SBO
- Flowserve 8L
- Flowserve Pac-Seal 8L
- Fluiten A9
- Vulcan 8DIN LONG
- Vulcan Type 8.DINL.STAT