


Größen

Qseals ST46 ist verfügbar in mindestens 34 verschiedenen Größen:

D1	D7	L4	Einheit
10.00	21.00	8.60	mm
12.00	23.00	8.60	mm
14.00	25.00	8.60	mm
16.00	27.00	8.60	mm
18.00	33.00	10.00	mm
20.00	35.00	10.00	mm
22.00	37.00	10.00	mm
24.00	39.00	10.00	mm
25.00	40.00	10.00	mm
28.00	43.00	10.00	mm
30.00	45.00	10.00	mm
32.00	48.00	10.00	mm
33.00	48.00	10.00	mm
35.00	50.00	10.00	mm
38.00	56.00	11.00	mm
40.00	58.00	11.00	mm
43.00	61.00	11.00	mm
45.00	63.00	11.00	mm
48.00	66.00	11.00	mm
50.00	70.00	13.00	mm
53.00	73.00	13.00	mm
55.00	75.00	13.00	mm
58.00	78.00	13.00	mm
60.00	80.00	13.00	mm
63.00	83.00	13.00	mm
65.00	85.00	13.00	mm
68.00	90.00	15.30	mm
70.00	92.00	15.30	mm
75.00	97.00	15.30	mm
80.00	105.00	15.70	mm
85.00	110.00	15.70	mm
90.00	115.00	15.70	mm
95.00	120.00	15.70	mm
100.00	125.00	15.70	mm

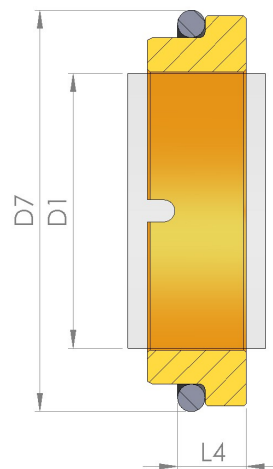

Technische Spezifikationen

Temperatur	... bis ... °C
Druck	... bar
Rotationsgeschwindigkeit	... m/s
Nach links drehen	Nein
Nach rechts drehen	Nein
Ausgeglichen	Nein

Stationäre Oberfläche

Qseals ST46 ist verfügbar in mindestens 5 verschiedenen stationären Oberflächenmaterialien:

- Carbon (CAR)
- Ceramic (CER)
- Silicon carbide (SIC)
- Stainless steel 316 (SS316)
- Tungsten carbide (TC)

Elastomere

Qseals ST46 ist verfügbar in mindestens 8 verschiedenen Elastomeren:

- Aflas (AFL)
- EPDM (EPDM)
- FEP Viton/Silicone (FEP)
- Kalrez (KAL)
- Nitrile (NIT)
- PTFE (PTFE)

- Silicone (SIL)
- Viton (VIT)

Alternativen

name ist eine Alternative zu mindestens 12 Produkten anderer Marken:

- AES S05U
- AES S05
- Burgmann G46
- Eriks SEO
- Flowserve 4L
- Flowserve Pac-Seal 4L
- Fluiten A
- John Crane BP
- Roten D
- Sealol DIN
- Vulcan 24DIN LONG
- Vulcan Type 24.DINL