


Sizes

The Qseals QCS06 is available in at least 15 different sizes:

D1	D3	L1	Unit
10.00	20.00	15.90	mm
12.00	22.00	16.00	mm
14.00	25.00	16.00	mm
15.00	27.00	17.40	mm
16.00	27.00	19.00	mm
18.00	30.00	20.50	mm
20.00	32.00	22.00	mm
22.00	35.00	23.50	mm
24.00	38.00	25.00	mm
25.00	40.00	26.50	mm
28.00	43.00	26.50	mm
30.00	45.00	25.00	mm
32.00	47.00	28.50	mm
35.00	50.00	28.50	mm
38.00	56.00	32.00	mm

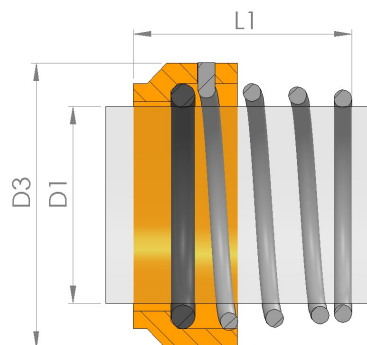

Technical specifications

Temperature	-20 till 200 °C
Pressure	10 bar
Rotational velocity	15 m/s
Rotate left	Yes
Rotate right	Yes
Balanced	No

Rotary faces

The Qseals QCS06 is available with at least 1 different rotary face materials:

- Carbon (CAR)

Elastomers

The Qseals QCS06 is available with at least 8 different elastomers:

- Aflas (AFL)
- EPDM (EPDM)
- FEP Viton/Silicone (FEP)
- Kalrez (KAL)
- Nitrile (NIT)
- PTFE (PTFE)
- Silicone (SIL)
- Viton (VIT)

Alternatives

The Qseals QCS06 is an alternative to at least 8 products of

other brands:

- ABS 11100040 (M2/20-00L)
- ABS 11100041 (M2/25-00L)
- AES T07U
- Burgmann M2
- Hecker HN 400A
- Roten 22
- Vulcan 9
- Vulcan Type 9

Applications

The Qseals QCS06 is used in at least 1 pumps and other applications:

- Speck Y-5081.0002