


Sizes

The Qseals QCS09 is available in at least 34 different sizes:

D1	D3	L1	Unit
10.00	19.00	25.50	mm
12.00	21.00	25.50	mm
14.00	23.00	28.00	mm
16.00	26.00	28.00	mm
18.00	29.00	27.50	mm
20.00	31.00	27.50	mm
22.00	33.00	27.50	mm
24.00	35.00	30.00	mm
25.00	36.00	30.00	mm
28.00	40.00	32.50	mm
30.00	43.00	32.50	mm
32.00	46.00	32.50	mm
33.00	46.00	32.50	mm
35.00	49.00	32.50	mm
38.00	53.00	32.00	mm
40.00	56.00	32.00	mm
43.00	59.00	32.00	mm
45.00	61.00	32.00	mm
48.00	64.00	32.00	mm
50.00	66.00	33.50	mm
53.00	69.00	33.50	mm
55.00	71.00	33.50	mm
58.00	76.00	38.50	mm
60.00	78.00	38.50	mm
63.00	81.00	0.00	mm
65.00	84.00	38.50	mm
68.00	88.00	0.00	mm
70.00	89.60	44.00	mm
75.00	98.00	44.00	mm
80.00	100.00	42.00	mm
85.00	107.50	42.00	mm
90.00	111.00	47.00	mm
95.00	119.00	47.00	mm
100.00	123.80	47.00	mm

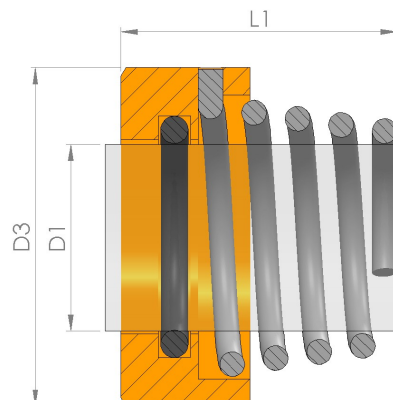

Technical specifications

Temperature	-20 till 200 °C
Pressure	10 bar
Rotational velocity	20 m/s
Rotate left	Yes
Rotate right	Yes
Balanced	No

Rotary faces

The Qseals QCS09 is available with at least 4 different rotary face materials:

- Carbon (CAR)
- Silicon carbide (SIC)
- Stainless steel 316 (SS316)
- Tungsten carbide (TC)

Elastomers

The Qseals QCS09 is available with at least 7 different elastomers:

- Aflas (AFL)
- EPDM (EPDM)
- FEP Viton/Silicone (FEP)
- Kalrez (KAL)
- Nitrile (NIT)
- Silicone (SIL)
- Viton (VIT)

Alternatives

The Qseals QCS09 is an alternative to at least 2 products of other brands:

- Burgmann M3N86
- Vulcan 126