


Sizes

The Qseals QCS06ST04 is available in at least 15 different sizes:

D1	D3	L1	D7	L4	Unit
10.00	20.00	15.90	19.20	6.60	mm
12.00	22.00	16.00	21.60	5.60	mm
14.00	25.00	16.00	24.60	5.60	mm
15.00	27.00	17.40	24.60	6.60	mm
16.00	27.00	19.00	28.00	7.50	mm
18.00	30.00	20.50	30.00	8.00	mm
20.00	32.00	22.00	35.00	7.50	mm
22.00	35.00	23.50	35.00	7.50	mm
24.00	38.00	25.00	38.00	7.50	mm
25.00	40.00	26.50	38.00	7.50	mm
28.00	43.00	26.50	42.00	9.00	mm
30.00	45.00	25.00	45.00	10.50	mm
32.00	47.00	28.50	48.00	10.50	mm
35.00	50.00	28.50	52.00	11.00	mm
38.00	56.00	32.00	55.00	10.30	mm

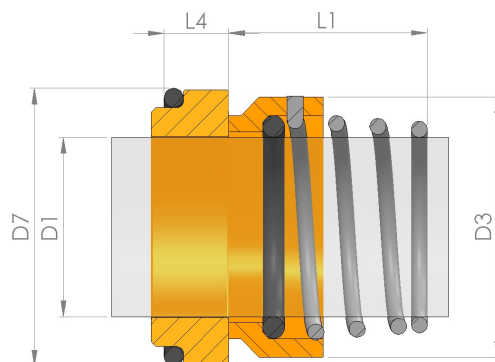

Technical specifications

Temperature	-20 till 200 °C
Pressure	10 bar
Rotational velocity	15 m/s
Rotate left	Yes
Rotate right	Yes
Balanced	No

Stationary faces

The Qseals QCS06ST04 is available with at least 4 different stationary face materials:

- Ceramic (CER)
- Silicon carbide (SIC)
- Stainless steel 316 (SS316)
- Tungsten carbide (TC)

Rotary faces

The Qseals QCS06ST04 is available with at least 1 different rotary face materials:

- Carbon (CAR)

Elastomers

The Qseals QCS06ST04 is available with at least 8 different elastomers:

- Aflas (AFL)
- EPDM (EPDM)

- FEP Viton/Silicone (FEP)
- Kalrez (KAL)
- Nitrile (NIT)
- PTFE (PTFE)
- Silicone (SIL)
- Viton (VIT)

Parts

The Qseals QCS06ST04 consists of 2 parts:

- Qseals QCS06
- Qseals ST04

Alternatives

The Qseals QCS06ST04 is an alternative to at least 3 products of other brands:

- Burgmann M2
- Roten 22
- Vulcan 9