


Sizes

The Qseals QMB02 is available in at least 27 different sizes:

D1	D3	L1	Unit
20.00	34.00	30.50	mm
22.00	36.00	30.50	mm
24.00	38.00	33.00	mm
25.00	39.00	33.00	mm
28.00	42.00	35.50	mm
30.00	44.00	35.50	mm
32.00	46.00	35.50	mm
33.00	47.00	35.50	mm
35.00	49.00	35.50	mm
38.00	54.00	37.00	mm
40.00	56.00	37.00	mm
43.00	59.00	37.00	mm
45.00	61.00	37.00	mm
48.00	64.00	37.00	mm
50.00	66.00	38.00	mm
53.00	69.00	38.00	mm
55.00	71.00	38.00	mm
58.00	78.00	42.00	mm
60.00	80.00	42.00	mm
65.00	85.00	42.00	mm
70.00	90.00	48.50	mm
75.00	99.00	48.50	mm
80.00	104.00	48.50	mm
85.00	109.00	48.50	mm
90.00	114.00	52.00	mm
95.00	119.00	52.00	mm
100.00	124.00	52.00	mm

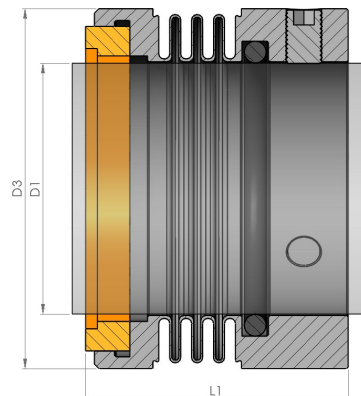

Technical specifications

Temperature	-40 till 250 °C
Pressure	20 bar
Rotational velocity	... m/s
Rotate left	Yes
Rotate right	Yes
Balanced	No

Rotary faces

The Qseals QMB02 is available with at least 3 different rotary face materials:

- Carbon (CAR)
- Silicon carbide (SIC)
- Tungsten carbide (TC)

Elastomers

The Qseals QMB02 is available with at least 8 different elastomers:

- Aflas (AFL)
- EPDM (EPDM)
- FEP Viton/Silicone (FEP)
- Kalrez (KAL)
- Nitrile (NIT)
- PTFE (PTFE)
- Silicone (SIL)
- Viton (VIT)

Alternatives

The Qseals QMB02 is an alternative to at least 1 products of other brands:

- Fluiten TSR